


Mechanical

Materials:			
Profile	Thermoplastic	UL 94V-0	
Ends and foots	Thermoplastic	UL 94V-2	
Weight	typical	220	g
Temperature range:			
Storage	range	-40...+70	°C
Operation	range	-40...+70	°C

Assembling

Can be assembled to standard 35 mm DIN-rail.

Mechanical dimensions

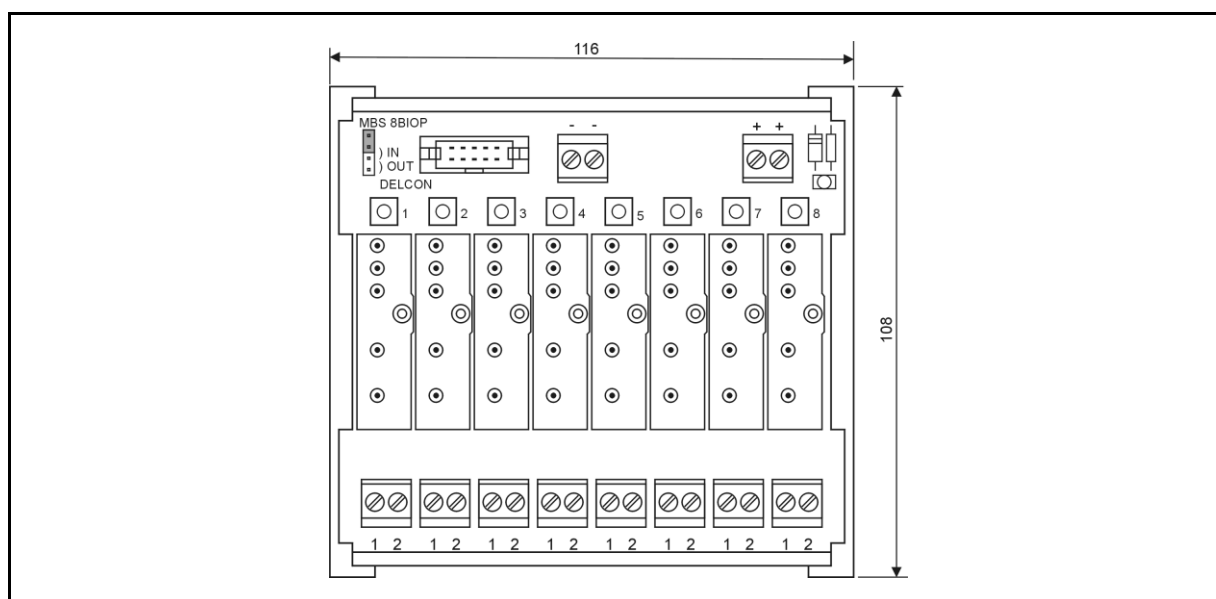

MBS 8BIOP (dimensions in mm, not to scale).

Approvals

	Certificate: E162828
	Fulfils requirements of the low voltage directive (LVD) 2006/95/EC.

Guarantee

This mounting socket made by Delcon Oy is guaranteed free from design and manufacturing defects for a period of 10 years from the manufacturing date. The guarantee liability is limited to replacement of defective material and related shipping charges. Defective products must be returned to the manufacturer for evaluation. This guarantee does not cover damage due to incorrect use or electrical overload.